


Temporary Handwashing Station

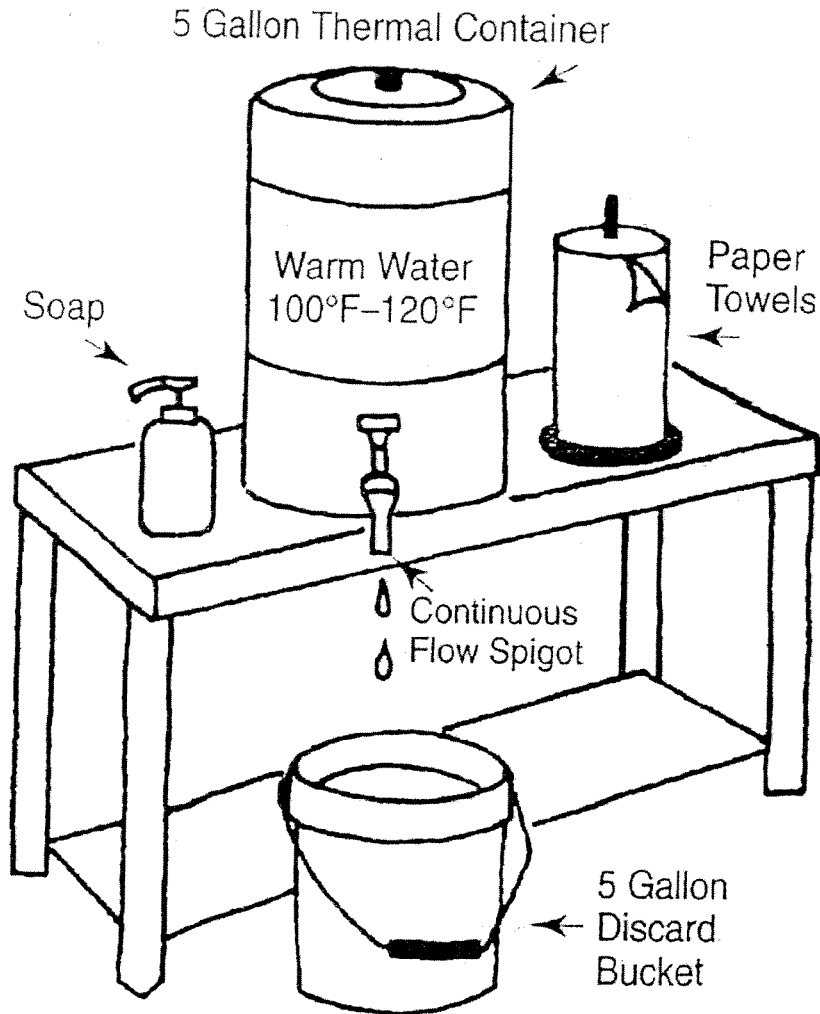

The temporary handwashing station shall consist of at least a 5-gallon - insulated container with spigot that provides a continuous flow of warm (100°F – 120°F) running water, soap, paper towels and a 5-gallon bucket to collect the dirty water.